

# quantum

AUTOMATIC MULTI FOV VIDEO MEASUREMENT SYSTEM



# quantum

A U T O M A T I C MULTI FIELD OF VIEW **VIDEO MEASUREMENT SYSTEM** 

Quantum is a fully integrated, easy to use, instant measurement system with no PC requirement.

Advanced digital image processing technology. Multi FOV zoom levels reduce measurement time and increase inspection efficiency.



## FEATURES & BENEFITS

# Instantly transform your manufacturing process with Quantum

### **RTLDC**<sup>™</sup>

**Real-Time Lens Distortion Correction\*.** Lens distortion is inherent in all microscopes. Image distortion at the outer edges of large samples is automatically corrected by the Quantum.

#### AshCal™

Save time with AshCal<sup>™</sup>. Factory calibration tracking for all lenses. No recalibration when changing magnification levels, giving consistent, accurate measurement with every zoom.


#### 2D Measurement & Graticules

Intuitive on screen full 2D patented measurement application. Point to point, diameter, angle, adjustable X-Y grid, shapes and annotation features to accommodate a multitude of samples specifications. Graticule creation allows samples to be analysed against on-screen digital templates with set tolerance limits. It also enables quick go/no-go defect analysis.



ure Table : Results File: biop needle 3 3 1 G cut dims chk.asl

C. Quantum ()

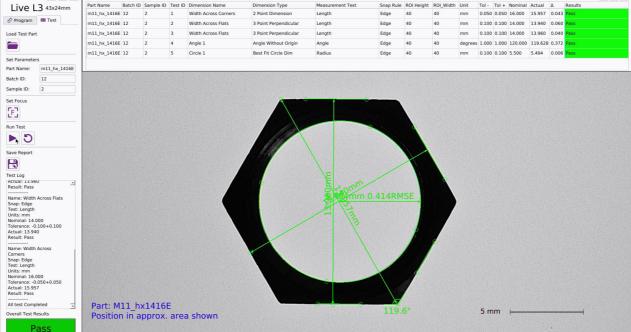

## FEATURES & BENEFITS

Instantly transform your manufacturing process with Quantum

## **Automatic Alignment**

Automate your process. Remove subjectivity and eliminate human error. Increase efficiency. Integrate robots and cobots and free valuable resources to work on other projects.

#### **Data Reporting**

Automatic part alignment, removes the need for a jig. The position of a part is automatically identified and re-orientated to its programmed measurement position.

## Instant Measurement

Place and press for fuss-free measurement. Save and recall programs for routine inspections. Simultaneous automatic measurements to speed up inspection time. Rapid pass/fail identification.

#### **Program and Test**

Program and test your parts in six easy steps.

## INTUITIVE USER INTERFACE

## PROGRAM AND TEST

## PROGRAM

There are 6 easy steps to allow you to program your parts/setup your measurements.

- 1 Open new part
- 2 Select Field of View which best suits the size of the part
- 3 Set focus point
- 4 Set the optimal lighting conditions for the part
- 5 Define the edges of the part to ensure readiness for measurement
- 6 Ready to perform measurements as outlined in the Measurement Suite section

## TEST


The Test option allows you to perform automatic testing of production parts.

Test your part against a master golden template to automatically identify defects. Simply load the test part, run the test and the results are clearly displayed on the screen. Results can be captured and exported to an Excel document for documentation and traceability.



## Included System Components

# Technical Specifications



## Optional System Components



LENSES

+5 Lens Al 280-150

Polarising Lens (Analyser) AI 100-041

Sub-Stage Polarising Film & Analyser


Sub-Stage Polarising Film AI 801-836

Polarised Ringlight & Analyser (58mm) AI 801-423




## Multi Field of View System

RTLDC<sup>™</sup> means no lens change is required to achieve multiple fields of view. Quantum uses digital



Field of View Chart L1 - L5

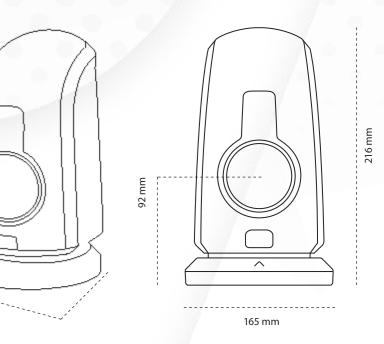

## **Technical Specifications**

Lens	+5 lens with 5 fixed position zooms
FOV	134mm x 75mm @L1 mag;
	87mm x 49mm @L2 mag;
	46mm x 26mm @ L3 mag;
	10mm x 6mm   @ L4 mag;
	4mm x 2mm @ L5 mag;
Illumination	Quadrant controllable LED ring light;
	Sub-stage transmitted LED illumination
Power	24 W
Dimensions	216(H) x 165(W) x 170(D) mm
Weight	1.75 kg
Temperature	Storage: -10°C to +60°C
	Operating: +5°C to +40°C
Video Format	Full HD (1920 x 1080p) at 50/60fps
Internal Storage	10 GB
Image Save	JPEG, BMP,
Format	Ash Measurement Format
Input/Ouput	HDMI Out, USB 2.0 Port x 4 RJ45,
	Ethernet Connector (for networking),
	General Purpose IO x 3, DC Power Jack



ASH HQ - Ireland B5, M7 Business Park, Naas, Co. Kildare W91 P684 +353 (0) 45 88 22 12

ASH UK Covert Farm, Long Lane, Easte Haddon, Northamptonshire NN6 8DU +44 (0) 7592 523 767



reddot award product design winner







sales@ashvision.com www.ashvision.com

All systems are now multilingual. Images, descriptions and technical data subject to change. Ash reserve the right to make changes without notice.



Printed on recycled paper